

Dairy-Pro® UF 7.5K Elements

Ultrafiltration 6" and 8" Spiral Element Series

PRODUCT DESCRIPTION

| | |
|----------------------------|---|
| Membrane Chemistry: | Proprietary semi-permeable polyethersulfone (PES) |
| Membrane Type: | UF 7.5K with observed separation range of 7,500 Daltons |
| Construction: | Sanitary spiral wound element with net outer wrap |
| Regulatory Status: | Compliant with US FDA CFR Title 21, EC Reg. No. 1935/2004, and EU Reg. No. 10/2011. Halal-certified by the Islamic Food and Nutrition Council of America (IFANCA) |

SPECIFICATIONS


| Part Number | Model | Active Membrane Area ft ² (m ²) |
|-------------|----------------|---|
| 0755578 | 6438-7.5K-30 | 250 (23.2) |
| 0755572 | 6438-7.5K-30 | 250 (23.2) |
| 0755573 | 6438-7.5K-45 | 194 (18.0) |
| 0755574 | 6438-7.5K-62 | 142 (13.2) |
| 0755575 | 6338-7.5K-30-T | 250 (23.2) |
| 0755576 | 6338-7.5K-45-T | 194 (18.0) |
| 0755577 | 6338-7.5K-62-T | 142 (13.2) |
| 0755752 | 8038-7.5K-30 | 401 (37.3) |
| 0755753 | 8038-7.5K-45 | 309 (28.7) |

OPERATING AND DESIGN INFORMATION*

| | |
|---|------------------------------|
| Typical Operating Pressure: | 30 - 120 psi (2.1 - 8.3 bar) |
| Maximum Operating Pressure: | 140 psi (9.7 bar) |
| Operating Temperature Range: | 41 - 131°F (5 - 55°C) |
| Cleaning Temperature Range: | 105 - 122°F (40 - 50°C) |
| Allowable pH - Continuous Operation: | 2.0 - 10.0 |
| Allowable pH - Clean-In-Place (CIP): | 1.8 - 11.0 |
| Design Pressure Drop Per Element: | 12-15 psi (0.8-1.0 bar) |
| Design Pressure Drop Per Vessel (3 in series): | 36-45 psi (2.5-3.1 bar) |
| Design Pressure Drop Per Vessel (4 in series): | 48-60 psi (3.3-4.1 bar) |

* Consult KSS Process Engineering Group for specific applications

NOMINAL DIMENSIONS

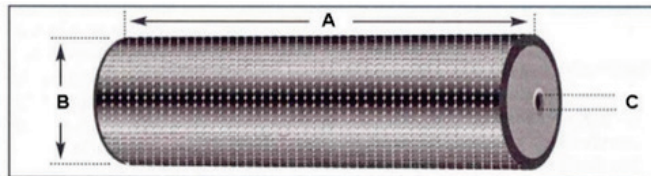

| Model | A | | B | | C | |
|-----------|--------|-------|--------|-------|--------|--------|
| | inches | (mm) | inches | (mm) | inches | (mm) |
| 6338 7.5K | 38.0 | (965) | 6.3 | (161) | 1.138 | (28.9) |
| 6438 7.5K | 38.0 | (965) | 6.4 | (163) | 1.138 | (28.9) |
| 8038 7.5K | 38.0 | (965) | 7.9 | (201) | 1.138 | (28.9) |

OPERATING GUIDELINES

Membrane Characteristics:

- The membrane used in these modules consists of a semipermeable polyethersulfone (PES) layer on a polyester backing material.
- Pure water flux of these PES 7.5K membranes is 1.0-2.2 gfd/psi (24-53 l/m²/h/bar) at 77°F (25°C).

Options:

- Diameter: 6.3, 6.4" or 8.0"
- Length: 38"
- Outer wrap: Controlled or tailed (-T)
- Feed spacer: 30 or 45-mil

Operating Limits:

- **Operating Pressure:** Maximum operating pressure is 140 psi (9.7 bar).
- **Permeate Pressure:** Permeate pressure should not exceed baseline (concentrate) pressure at any time (including on-line, off-line and during transition). Reverse pressure will damage the membrane.
- **Differential Pressure:** The maximum differential pressures per element are listed on the front of this document, including design values for multi-element housings.
- **Temperature:** Maximum operating temperature is 131°F (55°C). Maximum cleaning temperature is 122°F (50°C).
- **pH:** Allowable range for continuous operation is 2.0 to 10.0. Allowable pH range for cleaning is 1.8 to 11.0.

Water Quality for Cleaning & Diafiltration:

- **Turbidity and SDI:** Maximum feed turbidity is 1 NTU. Maximum feed SDI is 5.0 (15-minute test).
- **Guidelines:** Please refer to the KSS "Water Quality Guidelines for CIP and Diafiltration" for more detailed information.

Chlorine and Chemical Exposure:

- Adherence to cleaning and sanitizing procedures including chemical concentrations, pH, temperature, and exposure time is necessary to achieve maximum useful element life. Accurate records should be maintained.
- KSS standard cleaning procedures for dairy applications should be followed. Recommended chlorine exposure time at the defined conditions is 30 minutes per day.

- Residual chlorine concentration during cleaning cycle (CIP) should be 150 ppm @ pH 10.5 or higher. Chlorine concentration should never exceed 200 ppm.
- Chlorine should only be added to the cleaning solution after the pH has been adjusted to 10.5 or higher.
- Iron or other catalyzing metals in the presence of free chlorine or hydrogen peroxide will accelerate membrane degradation.
- Sanitizing should be done only after a complete cleaning cycle and with water of acceptable quality. Refer to cleaning instructions and feedwater quality technical bulletins.

Cationic Polymers and Surfactants:

7.5K membranes may be irreversibly fouled if exposed to cationic (positively charged) polymers or surfactants. Exposure to these chemicals during operation or cleaning is not recommended and will void the warranty.

Lubricants:

For element installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and will void the warranty.

Supplemental Technical Bulletins:

- UF Element Cleaning Procedures
- Water Quality Guidelines for CIP and Diafiltration

Service and Ongoing Technical Support:

KSS has an experienced staff available to assist end-users and OEM's for optimization of existing systems and development of new applications. KSS also offers a complete line of KOCHKLEEN® membrane pretreatment, cleaning, and maintenance chemicals.

KSS Capability:

KSS is the leader in crossflow membrane technology, manufacturing reverse osmosis, nanofiltration, microfiltration, and ultrafiltration membranes and membrane systems. The industries we serve include food, dairy and beverage, semiconductors, automotive, water and wastewater, chemical and general manufacturing. KSS adds value by providing top quality membrane products and by sharing our experience in the design and supply of thousands of crossflow membrane systems worldwide.

The information contained in this publication is believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance. We assume no responsibility, obligation or liability for results obtained or damages incurred through the application of the information contained herein. Refer to Standard Terms and Conditions of Sale and Performance Warranty documentation for additional information

Koch Separation Solutions, Inc. 850 Main Street, Wilmington, MA 01887
Main: +1-978-694-7000 • Fax: +1-978-657-5208 • Toll Free: +1-888-677-5624

For complete contact information and listing of our global locations, visit www.kochseparation.com

©2020 Koch Separation Solutions, Inc. All rights reserved worldwide. For related trademark information, visit www.kochseparation.com/legal.