

1812 Test Elements Information Sheet

Sanitary spiral wound elements with net wrap for small scale testing


MEMBRANE TYPE	
TFC® HRX	Thin Film Composite High Rejection RO membrane
TFC SR3D	Thin Film Composite NF membrane, 200 MWCO
HFK-131	Polyethersulfone UF membrane, 10K MWCO
HFK-328	Polyethersulfone UF membrane, 5K MWCO
HFK-525	Polyethersulfone UF membrane, 7.5K MWCO
HFK-909	Polyethersulfone UF membrane, 3K MWCO
MFK-603	Polyethersulfone MF membrane, 0.1 micron pore size, high temperature

Model	PRODUCT SPECIFICATIONS	
	Feed Spacer mil (mm)	Approximate Membrane area ft ² (m ²)
1812 NF / RO	45 (1.1)	3.0
1812 NF / RO	30 (0.8)	4.0
1812 UF	45 (1.1)	3.0
1812 UF	30 (0.8)	4.0
1812 MF	45 (1.1)	2.0
1812 MF	30 (0.8)	3.0

OPERATING AND DESIGN INFORMATION*		
Typical Operating Pressure	UF/MF:	30 - 120 psi (2.1 - 8.3 bar)
	NF/RO:	100 - 650 psi (6.8 - 44.8 bar)
Operating Temperature Range	NF/RO:	40 - 120°F (5 - 50°C)
	UF/MF:	40 - 130°F (5 - 55°C)
	MF:	40 - 176°F (5 - 80°C)

* Consult KMS Process Engineering for specific applications and other operating parameters

NOMINAL DIMENSIONS

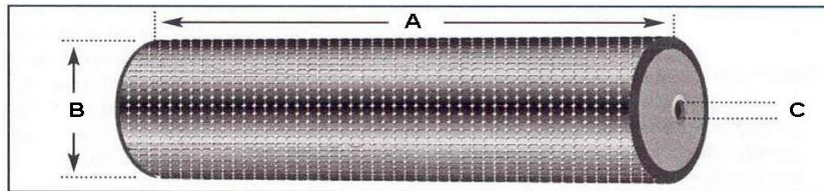

Model	A		B		C	
	inches	mm	inches	mm	inches	mm
1812 (all models)	12.0	305	1.9	48	0.63	16

The information contained in this publication is believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance. We assume no responsibility, obligation or liability for results obtained or damages incurred through the application of the information contained herein. Refer to Standard Terms and Conditions of Sale and Performance Warranty documentation for additional information

Koch Separation Solutions, Inc. 850 Main Street, Wilmington, MA 01887-3388
Main: +1-978-694-7000 • Fax: +1-978-657-5208 • Toll Free: +1-888-677-5624

For complete contact information and listing of our global locations, visit www.kochseparation.com

©2022 Koch Separation Solutions, Inc. All rights reserved worldwide. For related trademark information, visit kochseparation.com/legal.